

CABLE DATASHEET

• other connectors not shown

• other connectors not shown

TUBING 1.6mm

TUBING 1.6mm


ORDERING LENGTH

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM4 - IL<0.25dB , RL>30dB , 850nm & 1300nm  
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm  
LC/UPC - RL>50dB, 1310nm & 1550nm  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,  
BULK PACK IN OUTER CARDBOARD BOX.  
LONGER ASSEMBLY THEN 50MTRS COILED ON WOODEN REEL [1-S-8277](#)
- 6 - CABLE LENGTH TOLERANCES AND FANOUT LENGTH TOLERANCES  
ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - PULLING SYSTEM FROM BLACK TUBE IS ON BOTH SIDES OF THE ASSEMBLY (NOT SHOWN)  
OUTER DIAMETER OF THE PULLING TUBE IS 34,8mm
- 8 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER,  
DATE OF PRODUCTION AND ASSEMBLY LENGTH
- 9 - FOR THE FIXATION OF THE PRODUCT TO THE 1U PANEL IT IS NECESSARY TO USE ACCESSORIES

Nr.	FIBRE LENGTH
1-4	1080 ±40
5-8	1040 ±40
9-12	1000 ±40
13-16	960 ±40
17-20	920 ±40
21-24	880 ±40
25-28	840 ±40
29-32	800 ±40
33-36	760 ±40
37-40	720 ±40
41-44	680 ±40
45-48	640 ±40

ORDERING CODE

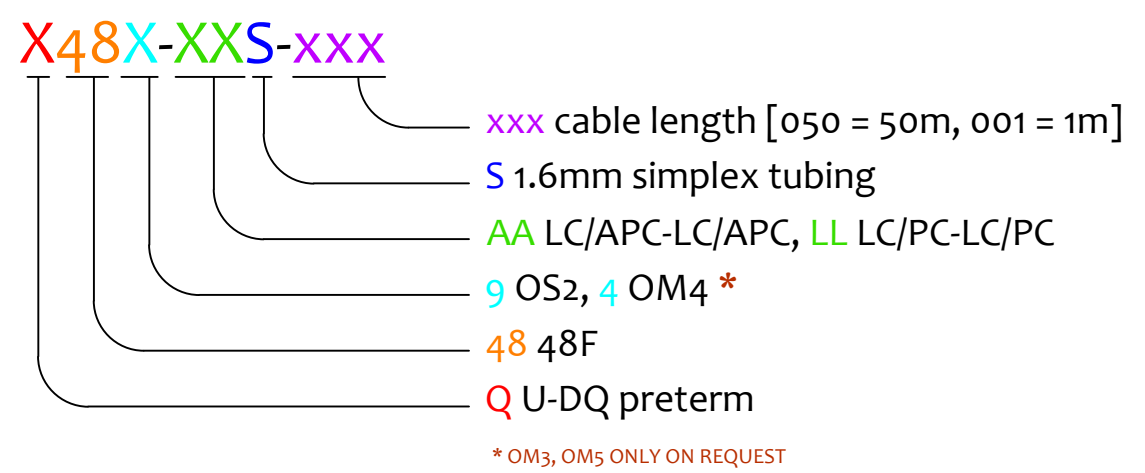

REVISION-DATE: A - 06.10.2023	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2023/06/10	TITLE: 48f LC-LC U-DQ PRETERM		
New drawing		CHECKED BY, DATE: M.Bombarova 2023/06/10			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh. 2023/06/10	PRODUCT SPECIFICATION: QPN - 000	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: Q48X-XXS-xxx	DRAWING NUMBER: 1-W-9580_1_A	SHEET NO.: 1 of 1	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
A			SIZE: A3		