


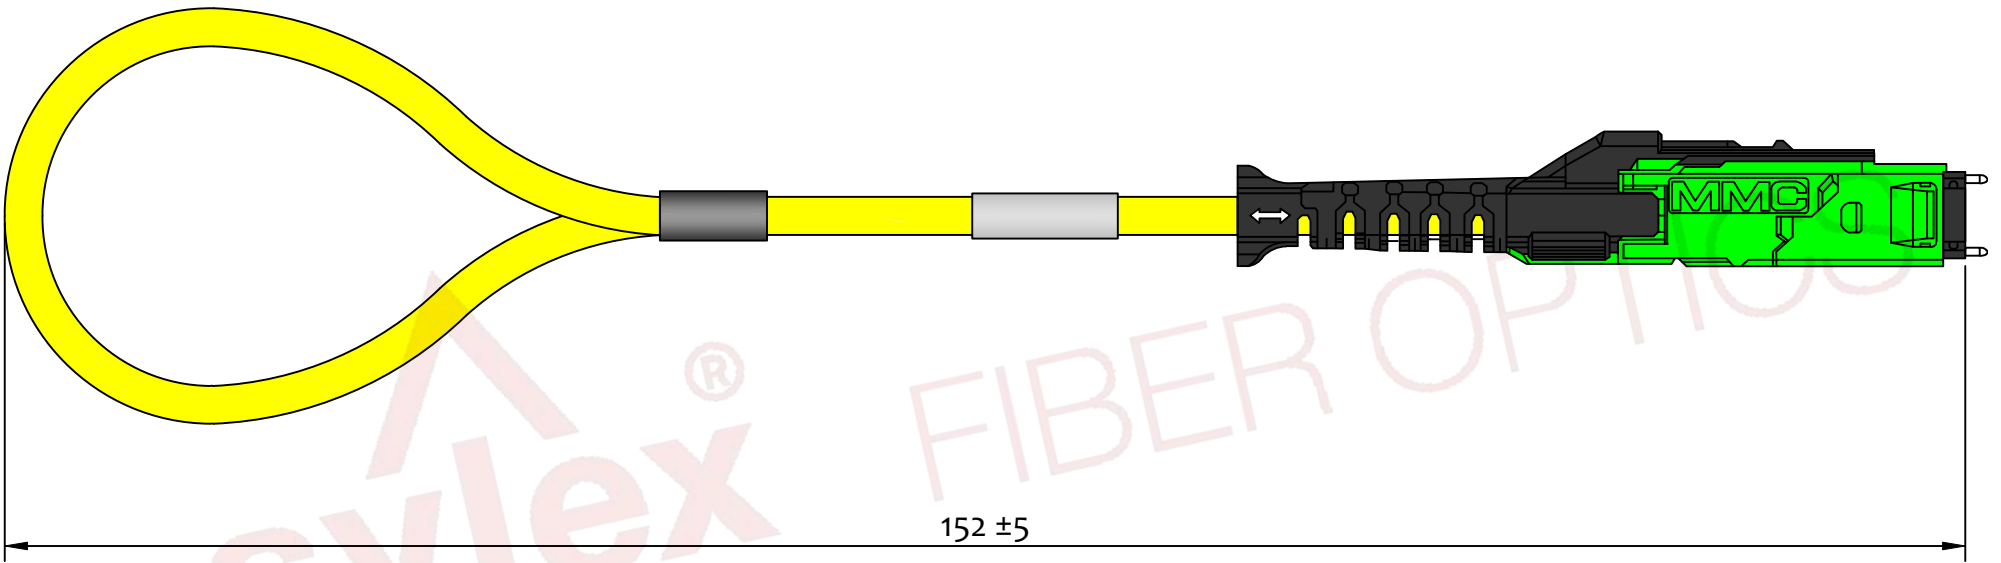

ORDERING CODE

L24X-XXX-LPB

- A MMC/APC Female 16F, B MMC/APC Male 16F
- 9 OS2, 3 OM3, 4 OM4
- 24 24F
- L Loopback

CONNECTION TABLE		
1	↔	13
2	↔	14
3	↔	15
4	↔	16
5	↔	17
6	↔	18
7	↔	19
8	↔	20
9	↔	21
10	↔	22
11	↔	23
12	↔	24

- NOTES :
- 1 - DUST CAP IS INCLUDED, BUT NOT SHOWN
 - 2 - CUMULATIVE TEST REPORT OF MEASURED IL VALUES SENT ON DEMAND IN ELECTRONIC FORM
 - 3 - OM3, OM4 - IL<0.7dB , 850nm & 1300nm
OS2 - IL<0.7dB, 1310nm & 1550nm
Channel value according IEC 61300-3-4 method D
 - 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31

REVISION-DATE: A - 20.06.2025		CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 20.06.2025		TITLE: MMC 24F Loopback						
New drawing			CHECKED BY, DATE: Bombar./Stask. 20.06.2025								
REVISION-DATE:			APPROVED BY, DATE: Matus/Smelh. 20.06.2025		PRODUCT SPECIFICATION: QPN - 000		DIMENSIONS IN MM UNLESS SPECIFIED		SCALE: NO SCALE		
REVISION-DATE: X - DD.MM.YYYY			CHANGE:		 PRODUCT NUMBER: L24X-XXX-xxx		DRAWING NUMBER: 2-W-0336_1_A		SHEET NO. 1 of 1		
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED					
						SIZE A3					