


SIDE A

SIDE B

TYPE A

PRIZM LT	MTP
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12

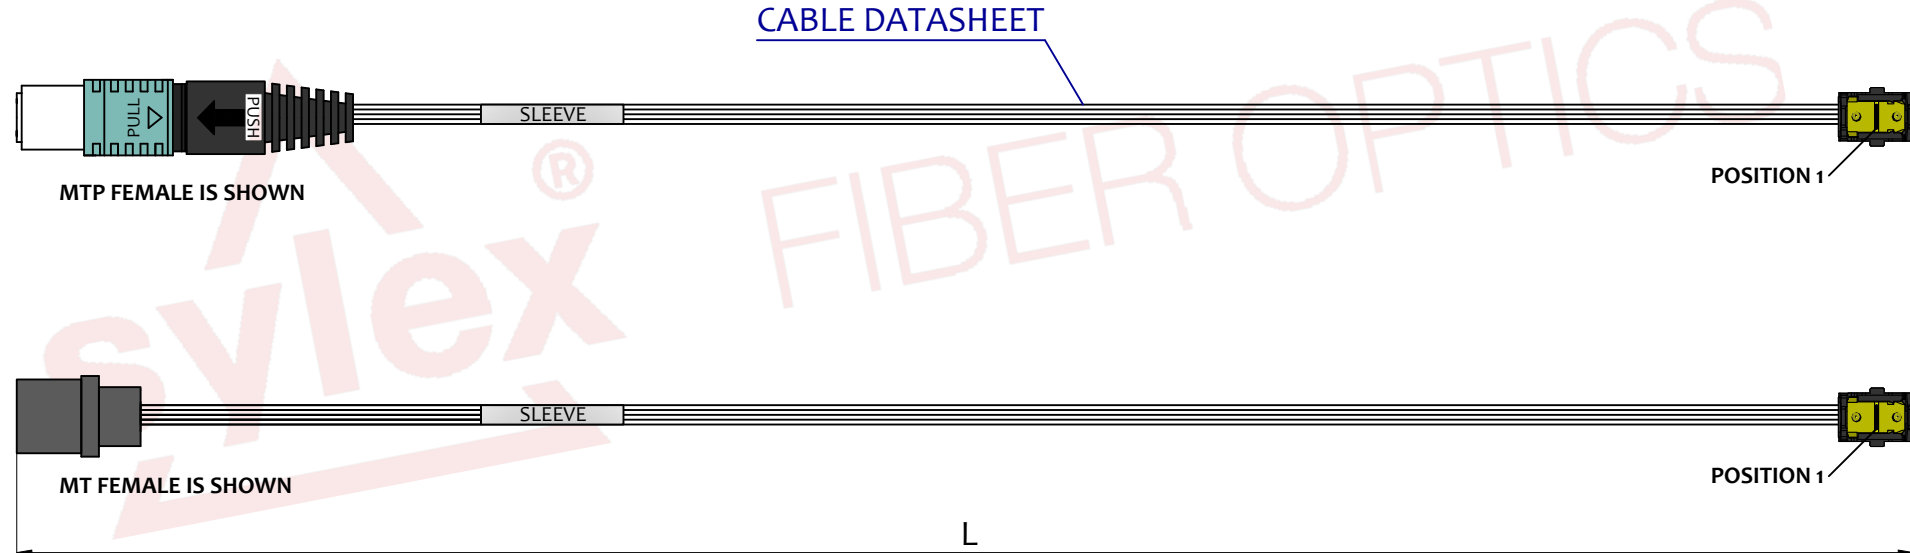

ORDERING CODE

B12X-OXX-xxxx-XX

- A Type A, X Polarity on customer demand
- 1 RIBBON PEELABLE, 2 RIBBON NON-PEELABLE
- CABLE LENGTH
- 1 MTP SHORT BOOT, 2 MTP STANDARD BOOT, X N/A
- F MTP FEMALE, M MTP MALE
- A MT FEMALE, B MT MALE
- 0 PRIZM LT (low profile housing)
- 3 OM3, 4 OM4
- 12 12F
- B On-Board Optics

NOTES :

- DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- OM3, OM4 (PRIZM LT) - IL<2.0dB , 850nm (CONNECTOR VALUE)
OM3, OM4 (MTP) - IL<0.35dB , 850nm (CONNECTOR VALUE)
RL>20dB , 850nm (GUARANTEED VALUE)
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- MTP VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
MTP END FACE GEOMETRY ACCORDING TO IEC 63267-3-31
- CUMULATIVE TEST REPORT OF MEASURED IL , RL
VALUES SENT ON DEMAND IN ELECTRONIC FORM
- ASSEMBLY PACKED IN SEALED PE BAG
BULK PACK IN OUTER CARDBOARD BOX
- TRACEABILITY LABEL ON THE CABLE CONTAINS
SERIAL NUMBER AND ASSEMBLY LENGTH

ASSEMBLY LENGTH	TOLERANCE
0-1.00m	+0.03 -0.00
+1.01m	+0.06 -0.00

REVISION-DATE: A - 17.03.2020	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2020/10/14	TITLE: 01x MT/MTP - 01x PRIZM LT 12F JUMPER		
New drawing		CHECKED BY, DATE: Matus/Smelh. 2020/10/14			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: L.Miskerik 2020/10/14	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: B12X-OXX-xxxx-XX	DRAWING NUMBER: 1-W-1871_1_A	SHEET NO. 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE A3