

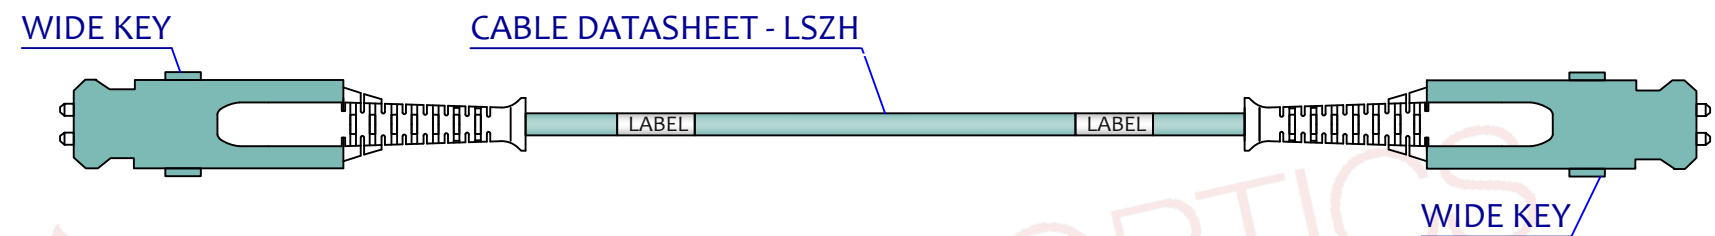


CROSS CONNECTION

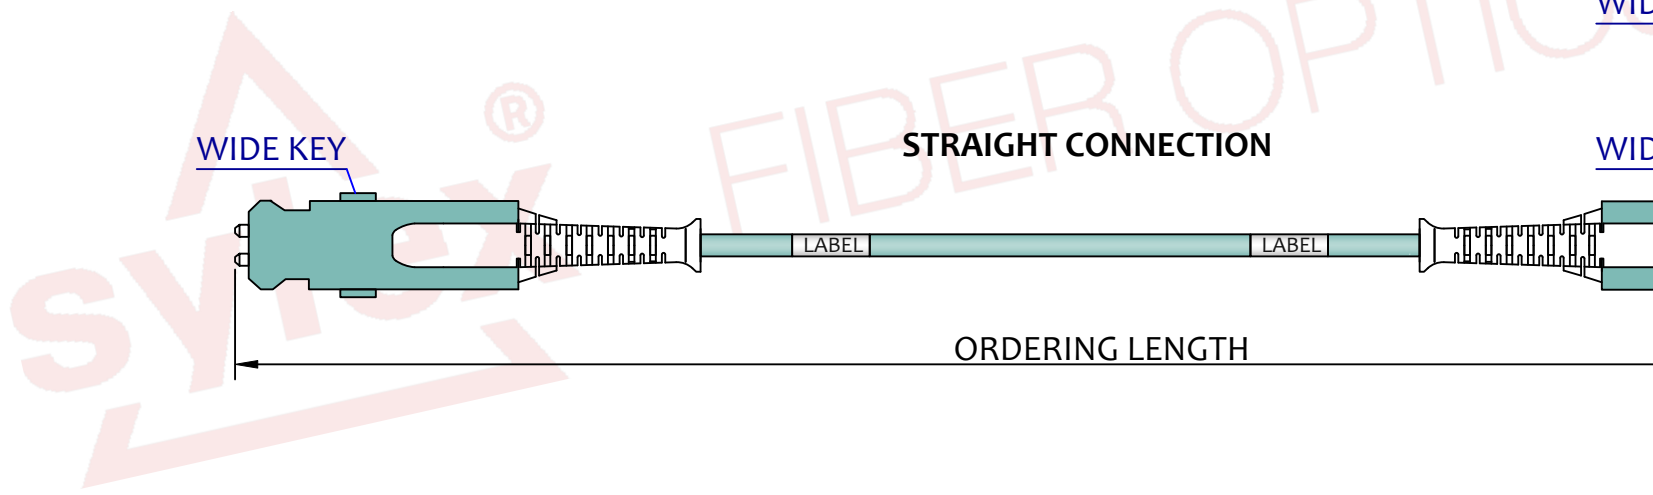

STRAIGHT CONNECTION

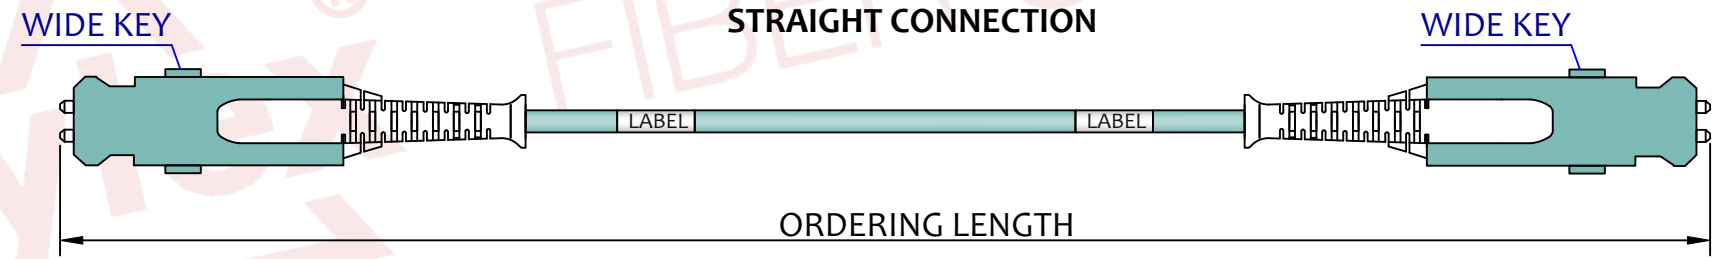

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm
OS2 - IL<0.25dB, SN/UPC - RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
- 6 - CABLE LENGTH TOLERANCES ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEABILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

ORDERING CODE

C26X-8XU-xxx-X

- C** PATCHCORD
- 2** DUPLEX
- 6** 1.6mm (LSZH)
- 9** OS2, **3** OM3, **4** OM4, **5** OM5
- 8** SN 1.6mm
- L** LC/PC, **A** LC/APC
- U** LC UNIBOOT, **X** FOR SN-SN ONLY
- xxx** cable length [050 = 50m, 001 = 1m]
- S** STRAIGHT, LEAVE EMPTY FOR CROSS

REVISION-DATE: A - 26.03.2021	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2021/03/26	TITLE: 2f SN Duplex Patchcord		
New drawing		CHECKED BY, DATE: L.Miskerik			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: XXX-XXX-xxx-X	DRAWING NUMBER: 1-W-8379_1_A	SHEET NO. 1 of 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED			SIZE A3