


LC-LC 24-fiber Duralino trunk, free tails 900um transparent tubing

Basic characteristics

- ▲ Durable material
- ▲ Compact
- ▲ Light weight
- ▲ No gluing – no stress of fiber inside the fan-out

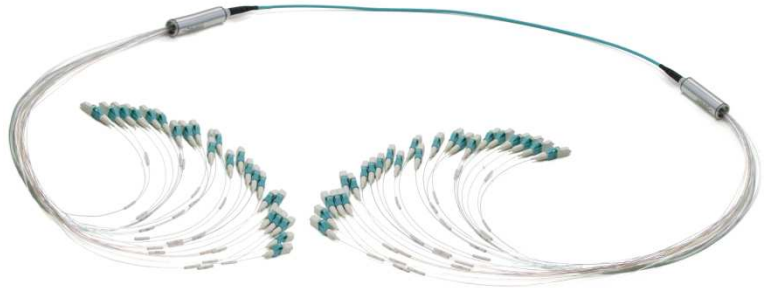

Benefits

- ▲ Compact design of cable – outer diameter only 3,8mm
- ▲ Durable metal fan-out

Applications

- ▲ DataCenter cabling
- ▲ Inside building interconnections
- ▲ Direct patching of ODFs

Temperature range

Controlled environment (-10°C/+60°C)

Cable parameters

| | | |
|--------------------|-----------------------|----------------|
| Jacket material | LSZH | |
| Cable construction | Round cable | |
| Outer diameter | 3,8mm | |
| Fiber count | 24 | |
| Fiber type | SM OS2 or MMF OM3/OM4 | |
| Temperature range | operation: | -10°C to +70°C |
| | storage: | -25°C to +70°C |
| | installation: | -5°C to +50°C |

LC-LC 24-fiber Duralino trunk, free tails 900um transparent tubing

Connector parameters

| | LC SM | LC MM |
|------------------|----------------------------|------------------|
| Compliance | Telcordia GR-326 | Telcordia GR-326 |
| Color of housing | Blue (UPC)/Green (APC) | Aqua/Magenta |
| Color of boot | White (UPC) or Green (APC) | White |
| Polish | Flat (UPC) or Angled (APC) | Flat (PC) |
| Insertion Loss | <0,25dB | <0,25dB |
| Return Loss | >50dB (UPC)/>60dB (APC) | >30dB |

Identification

Traceability label with unique serial number on both ends of cable assembly.

Packaging

Each assembly in plastic bag, bulk pack in cardboard box.
Longer lengths coiled on cardboard reel.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk