


CONNECTION TABLE	
NUMBER OF FIBER	
1	1
⋮	⋮
THROUGH	⋮
96	96

LENGHT TOLERANCE	
Length interval(m)	Tolerance(m)
0 - 0,99	+ 0,06 - 0
1 - 7,99	+ 0,11 - 0
8 - 19,99	+ 0,18 - 0
20 - 49,99	+ 0,23 - 0
50 - 99,99	+ 0,50 - 0
100 - 199,99	+ 1,00 - 0
200 - 299,99	+ 1,50 - 0
> 300	+ 3,00 - 0

PRODUCT NUMBER:	L[m]	CONN 1	CONN 2	FIBER TYPE	CABLE JACKET COLOUR	LC CONN. BODY / BOOT COLOUR
1-112-112-960-1K1/Ao/XXXX	$L \pm \begin{smallmatrix} 0,XX \\ 0 \end{smallmatrix}$	LC/UPC	LC/UPC	OS2	YELLOW	BLUE / WHITE
1-113-113-960-1K1/Ao/XXXX	$L \pm \begin{smallmatrix} 0,XX \\ 0 \end{smallmatrix}$	LC/APC	LC/APC	OS2	YELLOW	GREEN / GREEN
1-110-110-960-6KB/Ao/XXXX	$L \pm \begin{smallmatrix} 0,XX \\ 0 \end{smallmatrix}$	LC/PC	LC/PC	OM3	AQUA	AQUA / WHITE
1-110-110-960-9KD/Ao/XXXX	$L \pm \begin{smallmatrix} 0,XX \\ 0 \end{smallmatrix}$	LC/PC	LC/PC	OM4	MAGENTA	MAGENTA / WHITE


XXXX in the PN represents length of assembly and varies for each length

CABLE PROFILE VIEW

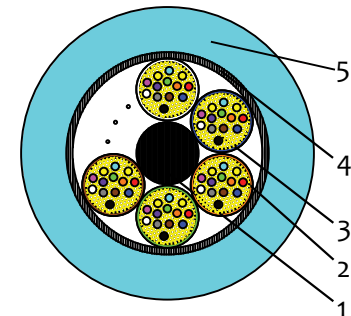

- 1.CENTRAL FRP STRENGTH MEMBER
- 2.Micro-BUNDLE
- 3.BARE FIBERS
- 4.STRAIN RELIEF ELEMENTS - ARAMID YARNS
- 5.OUTER JACKET - LSZH

TRACEBILITY LABEL (POS. 7)

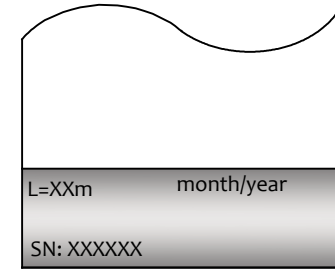

MARKING SLEEVE (POS. 5)



XX - NUMBER OF FIBER

- NOTES:
- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
 - 2 - CUMULATIVE TEST REPORT SYX-CTRT-01 OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
 - 3 - OM3, OM4 - IL<0.25dB, RL>30dB, 850nm & 1300nm
OS2 - IL<0.25dB, LC/APC - RL>60dB, 1310nm & 1550nm
LC/UPC - RL>50dB, 1310nm & 1550nm
 - 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
 - 5 - ALL CONNECTORS BUNDLED AND WRAPPED IN BUBBLE FOIL SLEEVE (POS.6)
 - 6 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL, INSERTED IN CARDBOARD BOX ACCORDING TO SYLEX STANDARD 1-S-0011
 - 7 - SYLEX-SX-O LABEL ON PRODUCT PACKAGING AND OUTER CARDBOARD BOX

BOM		
NO:	DESCRIPTION	QTY
1.	LC CONNECTOR	192
2.	MICRO BUNDLE CABLE Ø 6,4-7.5mm , 96F	L
3.	TRANSPARENT 900um TUBNIG	192
4.	DURALINO FANOUT SIZE L, Ø21mm	2
5.	MARKING SLEEVE	192
6.	BUBBLE FOIL	not shown
7.	TRACEABILITY LABEL	2

REVISION-DATE: A - 18.11.2013 - created a new drawing	CHANGE:	DRAWN BY, DATE: J.Špilár 2013/11/15	TITLE: LC-LC 96-fiber Duralino trunk Transparent tubing		
REVISION-DATE: B - 20.04.2017 - Cable diameter change	CHANGE:	CHECKED BY, DATE: E.Koza 2013/11/18	APPROVED BY, DATE: I.Golian 2013/11/18	PRODUCT SPECIFICATION: QPN - 357	DIMENSIONS IN MM UNLESS SPECIFIED
REVISION-DATE: X - DD.MM.YYYY XXX	CHANGE:	PRODUCT NUMBER: 1-11X-11X-960-XXK/Ao/XXXX	DRAWING NUMBER: 1-S-2491_1_B	SCALE: NO SCALE	SHEET NO. 1 of 1
<p style="text-align: center;">B</p> <p style="text-align: center;">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>					SIZE A3