


CONNECTION TABLE	
MTP	MDC
1	1B
2	2B
3	3B
4	4B
5	
6	
7	
8	
9	4A
10	3A
11	2A
12	1A

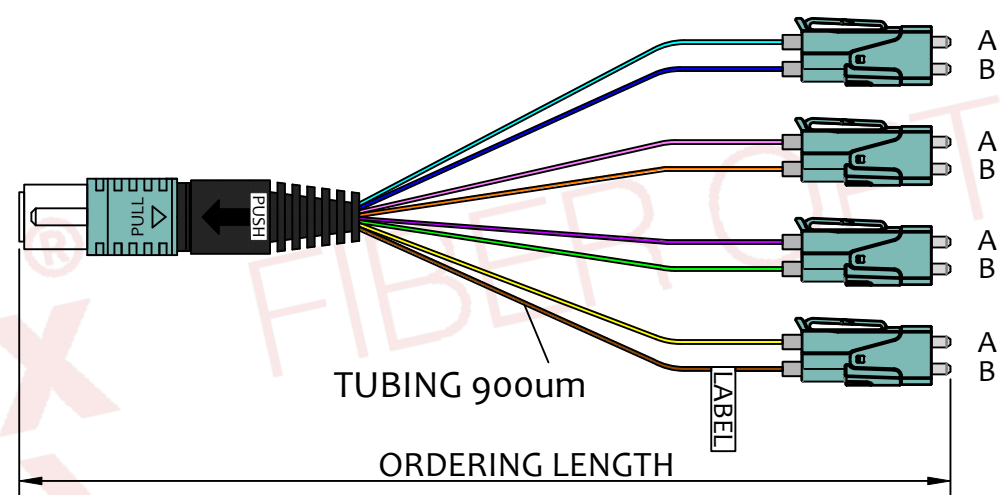

**NOTES :**

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - MDC: OM3, OM4, OM5 - IL<0.25dB , RL>30dB , 850nm & 1300nm  
MDC: OS2 - IL<0.25dB, MDC/APC - RL>60dB, 1310nm & 1550nm  
MDC/UPC - RL>50dB, 1310nm & 1550nm  
  
MTP: OM3, OM4, OM5 - IL<0.35dB , RL>20dB , 850nm & 1300nm  
MTP: OS2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm  
  
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B  
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.  
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326 (Singlefiber connector)  
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31 (Multifiber connector - APC polished)  
END FACE GEOMETRY ACCORDING TO IEC 63267-3-31 (Multifiber connector - FLAT polished)
- 5 - ASSEMBLY PACKED IN SEALED PE BAG, BULK PACK IN OUTER CARDBOARD BOX.
- 6 - CABLE LENGTH TOLERANCES A ACCORDING TO SYLEX STANDARD [1-S-8000](#)
- 7 - TRACEBILITY LABEL ON THE CABLE CONTAINS SERIAL NUMBER, DATE OF PRODUCTION AND ASSEMBLY LENGTH

**ORDERING CODE**

**Fo8X-XW9-xxx-D**

- D direct split version
- CABLE LENGTH**
- 9 900um tubing
- W MDC (Jr)
- F MTP(F) 12F, M MTP(M) 12F, J MTP(F) PRO 12F, P MTP(M) PRO 12F
- 9 OS2, 3 OM3, 4 OM4, 5 OM5
- o8 8F
- F fanout

REVISION-DATE: A - 16.09.2020	CHANGE:	DRAWN BY, DATE: P. Gaspar 2020/09/16	TITLE: 8f MTP - MDC Direct Split		
NEW DRAWING		CHECKED BY, DATE: Pavlov/Matúš			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I. Brestovanská	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE: X - DD.MM.YYYY	CHANGE:	PRODUCT NUMBER: Fo8X-XW9-xxx-D	DRAWING NUMBER: 1-W-8023_1_A	SHEET NO. 1 of 1	
A			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND ANY USE WITHOUT PRIOR WRITTEN PERMISSION IS PROHIBITED		
			SIZE A3		