


Duplex patch cord

Basic characteristics

- ▲ Standard duplex patch cords with all standard connectors

Applications

- ▲ Telecom/Datacom
- ▲ Telehouse interconnections
- ▲ DataCenter

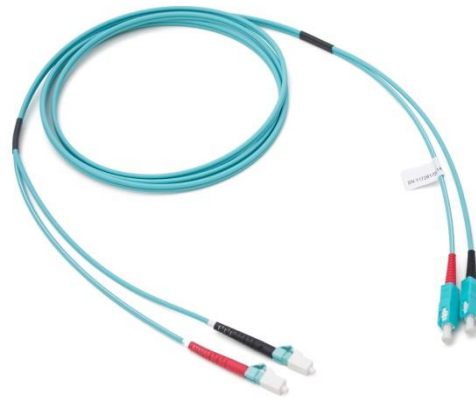

Temperature range

Indoor controlled environment (-10°C /+60°C)

Cable parameters

Jacket material	LSZH	
Cable construction	Duplex cable	
Outer diameter	approx 1.8mm x 3.7mm	
Fiber count	2	
Fiber type	SM OS2 or MMF OM1/OM2/OM3/OM4	
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

	LC, SC, ST, FC, E2000	
Insertion Loss (acc. IEC 61300-3-4 method B)	<0,25dB (@ 1310/1550nm)	
	<0,25dB (@ 850/1300nm)	
Return Loss (acc. IEC 61300-3-6)	>50dB(UPC) / >60dB(APC) (@ 1310/1550nm)	
	>30dB (@ 850/1300nm)	

Identification

Traceability label with unique serial number.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.
Longer lengths coiled on cardboard/wooden reel.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk